



Fit & Forget...

The robust NEPTUNE FIT & FORGET electronic T8 weatherproof batten series.




SEE THE WORLD IN A NEW LIGHT

OSRAM



NEPTUNE FIT & FORGET ELECTRONIC WEATHERPROOF T8 BATTEN SERIES

The new NEPTUNE FIT & FORGET series by OSRAM meets the highest demands in weatherproof fluorescent lighting applications. With its sophisticated design and unique features the NEPTUNE FIT & FORGET battens guarantee to impress.

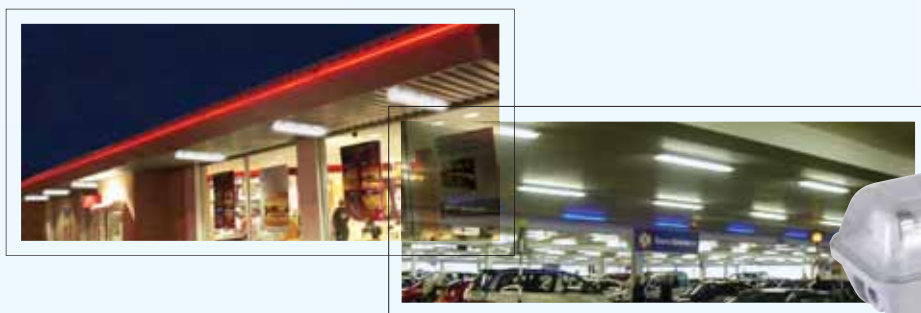


Features

- Equipped with OSRAM QUICKTRONIC® electronic ballast offering **up to 25% energy saving**.
- Complete with OSRAM LUMILUX® XXT T8 lamps with **extra long life of 75,000 hours** offering much lower maintenance costs.
- **Robust IP 65 housing** and cover made from high grade polycarbonate for high impact resistance and protection in dusty and moist conditions.
- **5 year warranty** on fitting, lamp and components.


- Installation friendly, stainless steel clips and mounting brackets for better endurance.
- Available in 1x36W, 2x36W, 1x58W and 2x58W versions.

Applications


The new NEPTUNE FIT & FORGET series is ideal for most outdoor applications such as car parks, industrial applications, under eave lighting, building sites and walk ways.

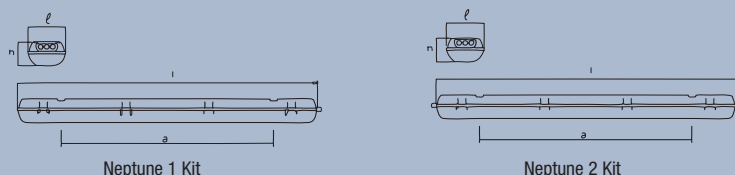

| Reference | NEPTUNE Fit & Forget 1 x 36W | NEPTUNE Fit & Forget 2 x 36W | NEPTUNE Fit & Forget 1 x 58W | NEPTUNE Fit & Forget 2 x 58W |
|-----------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| Product Number (EAN) | 9334728001300 | 9334728001317 | 9334728001324 | 9334728001331 |
| Colour | Grey | Grey | Grey | Grey |
| Material | Polycarbonate (PC) | Polycarbonate (PC) | Polycarbonate (PC) | Polycarbonate (PC) |
| Clip Material | Stainless Steel | Stainless Steel | Stainless Steel | Stainless Steel |
| l (length) | 1275 mm | 1275 mm | 1575 mm | 1575 mm |
| w (width) | 100 mm | 160 mm | 100 mm | 160 mm |
| h (height) | 108 mm | 108 mm | 108 mm | 108 mm |
| a (distance btw. mounting) | 900 mm | 900 mm | 965 mm | 965 mm |
| Wattage | 36 W | 72 W | 58 W | 116 W |
| Mains Voltage | 230...240 V | 230...240 V | 230...240 V | 230...240 V |
| Mains Frequency | 50 / 60 Hz | 50 / 60 Hz | 50 / 60 Hz | 50 / 60 Hz |
| Power Factor | 0.9 | 0.9 | 0.9 | 0.9 |
| Lamp start | Instant Start | Instant Start | Instant Start | Instant Start |
| Lamp base | G13 | G13 | G13 | G13 |
| Safety | According to IEC 60598 | According to IEC 60598 | According to IEC 60598 | According to IEC 60598 |
| IP Rating | IP 65 | IP 65 | IP 65 | IP 65 |
| Standard pack (pcs) | 6 x 1 | 6 x 1 | 6 x 1 | 6 x 1 |



1 X 36W
Luminaire efficiency:
0.68 H + 0.16 T



2 X 36W
Luminaire efficiency:
0.71 H + 0.10 T

NEPTUNE - OSRAM AU 02/09 Subject to modification without notice. Errors and omissions excepted.

Class I IK08 850°C